1 962



QPM2102D

QPM2160D, QPM2162D

QPM1100, QPM2100, QPM2102 QPM2160, QPM1160, QPM1162, QPM2163, QPM2180

> QPM11.. QPM21..

Duct Air Quality Sensors

- Maintenance-free CO₂ sensing element (depending on the type) based on optical infrared absorption measurement (NDIR¹)
- Or with VOC²⁾ sensing element, based on a heated tin dioxide semiconductor
- CO_2 temperature (active or passive) and CO_2 humidity-temperature multisensor
- No recalibrations required
- Operating voltage AC 24 V or DC 15...35 V
- Signal outputs DC 0...10 V or DC 0...5 V or 4...20 mA adjustable
- Selectable passive temperature sensing element
- 1) NDIR = Non dispersive infrared
- 2) VOC = volatile organic compounds (also called mixed gas)

Use

In air ducts of ventilation and air conditioning plant to enhance room comfort and to optimize energy consumption by providing demand-controlled ventilation. The sensor acquires:

- CO₂ concentrations
- VOC concentrations as an indication of odors in the duct air, such as tobacco smoke, body odor, or material fumes
- The relative humidity of the duct air
- The duct air temperature

Sensors QPM11... and QPM21... can be used as a:

- Control sensor in the supply or extract air duct
- Transmitter for building automation and control systems and / or display units (QPM21...D only).

Typical use:

- Acquisition of CO₂ and VOC concentrations: In party rooms, lounges, fair pavillions and exhibition halls, restaurants, canteens, shopping malls, sports gymnasiums, sales rooms, and conference rooms
- Acquisition of CO₂ concentrations: In ventilation plant of rooms with varying occupancy levels where smoking is prohibited, such as museums, theatres, movie theatres, auditoriums, office spaces and school rooms

Important!

- The QPM21... sensors are not suited for use as safety devices, such as gas or smoke warning devices!
- The sensors must not be used outdoors!

Type reference	CO ₂ measuring range	VOC time constant	Temperature measuring range	Humidity measuring range	Measured value display
QPM1100		Slow (R1) Normal (R2) Fast (R3)			
QPM1160		Slow (R1) Normal (R2) Fast (R3)	050 °C / −35+35 °C		no
QPM1162		Slow (R1) Normal (R2) Fast (R3)	050 °C / −35+35 °C	0100 %	no
QPM2100	02000 ppm				no
QPM2102	02000 ppm	Slow (R1) Normal (R2) Fast (R3)			no
QPM2102D	02000 ppm	Low (R1) Normal (R2) High (R3)			yes
QPM2160	02000 ppm		050 °C / –35+35 °C		no
QPM2160D	02000 ppm		050 °C / –35+35 °C		yes
QPM2162	02000 ppm		050 °C / –35+35 °C	0100 %	no
QPM2162D	02000 ppm		050 °C / –35+35 °C	0100 %	Yes
QPM2163	02000 ppm	Slow (R1) Normal (R2) Fast (R3)	050 °C / –35+35 °C	0100 %	no
QPM2180	02000 ppm		Depending on connected sensing element		no

Type summary

Ordering

When ordering, please give name and type reference, e.g.: Duct air quality sensor **QPM2102** The sensor is supplied complete with mounting flange and cable entry gland M16.

Equipment combinations

All systems and devices capable of processing the following sensor signals:


- DC 0...10 V or DC 0...5 V or 4...20 mA
- passive sensor signals for sensor QPM2180

CO₂ concentrations

The Symaro[™] air quality sensors acquire the CO₂ concentration by infrared absorption measurement (NDIR).

The resulting output signal of DC 0...10 V or DC 0...5 V or 4...20 mA is proportional to the CO₂ content of the ambient air.


Function diagram CO₂ (output X1)




VOC concentration (QPM1100, QPM1160, QPM1162)

Symaro[™] air quality sensors determine the mixed gas concentration (VOC) using metal-oxide semiconductor sensing elements. The sensors measure precisely at all times and with no maintenance and recalibration required thanks to an integrated compensation mechanism, saving service costs.

The sensor provides a DC 0...10 V or DC 0...5 V or 4...20 mA output signal proportionate to the VOC content of the ambient air.

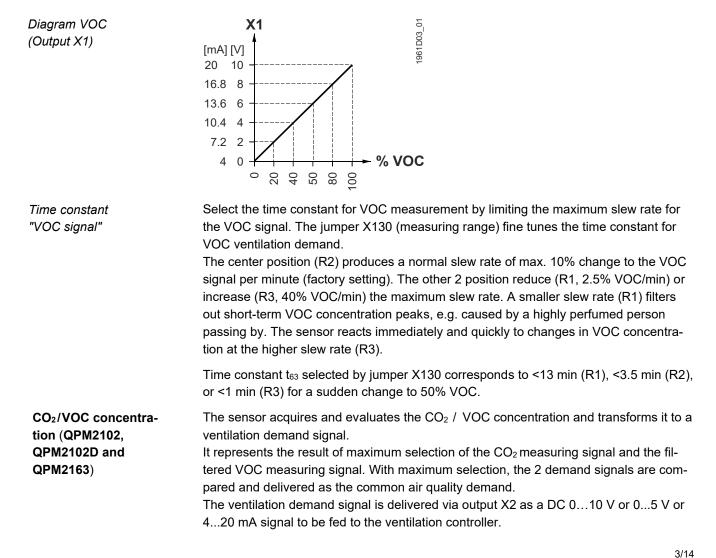

Ventilation demand diagram (output X2)



Relative humidity (QPM2162, QPM2162D QPM1162 and QPM2163) The sensor acquires the relative humidity in the air duct with a capacitive humidity sensing element whose capacitance changes as a function of the relative humidity. An electronic measuring circuit converts the signal from the sensing element to a continuous DC 0...10 V or DC 0...5 V or 4...20 mA signal, corresponding to a relative humidity range of 0...100 %.

Temperature active (QPM216...)


The sensor acquires the temperature in the air duct with a sensing element whose electrical resistance changes as a function of the temperature. The change is converted to an active DC 0...10 V or DC 0...5 V or 4...20 mA output signal ($\cong 0...50$ °C or -35...+35 °C).


Temperature passive (QPM2180)


The sensor measures the room temperature using a sensing element where electrical resistance changes with the temperature of the ambient air. The sensing element is on the device's rear side and connected at the appropriate connection terminals. The following sensing elements are included with the device: - LG-Ni1000

- Pt1000
- Pt100
- NTC 10kOhm

Sensing element





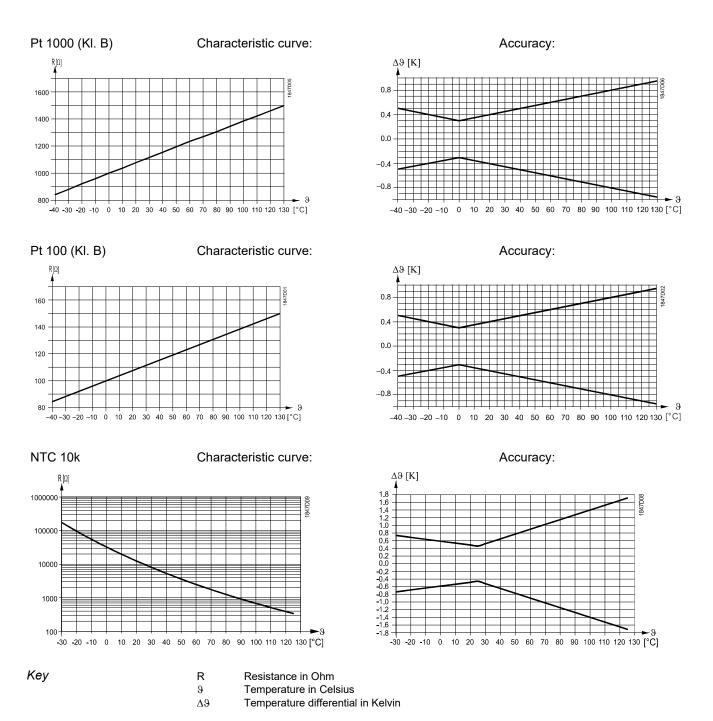

Mechanical design

The duct air quality sensor consists of housing, printed circuit board, connection terminals, mounting flange and immersion rod with measuring probe.

The 2-sectional housing is comprised of base and removable cover (without display: snap-on design; with display: screwed fastening). The measuring circuit and the setting elements are located on the printed circuit board inside the cover, the connection terminals on the base.


The humidity and temperature sensing elements are located at the end of the measuring probe and are protected by a filter cap.

Cable entry is made via the cable entry gland M16 (IP 54) supplied with the sensor, which screws into the housing.

Immersion rod and housing are made of plastic and are rigidly connected.

The sensor is fitted with the mounting flange supplied with the sensor. The flange is to be placed over the immersion rod and then secured in accordance with the required immersion length.

Setting elements ...

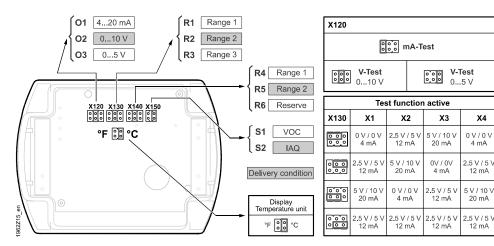

The setting elements are located inside the cover

The different vertical plug positions have the following meaning:

2100	 For the CO₂ measuring range: Shorting plug in the mid position (R2) 	= 02000 ppm (factory setting)
1100, , QPM1162, ; and ;D	 For VOC weighting: Shorting plug in the left position (R1) Shorting plug in the mid position (R2) Shorting plug in the right position (R3) 	 VOC sensitivity " slow " VOC sensitivity "normal" (factory setting) VOC sensitivity " fast "
2160/2160D 2162/2162D/	 For the temperature measuring range: Shorting plug in the left position (R1) Shorting plug in the mid position (R2) 	 = −35+35 °C = 050 °C (factory setting)
/QPM1162/	 For the temperature measuring range: Shorting plug in the left position (R4) Shorting plug in the mid position (R5) Shorting plug in the right position (R6) 	 −35+35 °C = 050 °C (factory setting) Reserve
2163	 For the IAQ / VOC output Shorting plug in the left position (S1) Shorting plug in the right position (S2) 	VOC onlyIAQ = CO2+VOC (factory setting)
put for all	01 02 03	= 420 mA = DC 010 V = DC 05 V
active test	Shorting plug for the measuring range in the h The signal output delivers the values according	-

... for selection of the temperature unit on the

- For the unit of temperature:
 - Jumper in the vertical, right position - Jumper in the vertical, left position
 - = °C (factory setting) = °F

with QPM2 with QPM1

...for the measuring range

QPM1160, QPM2163 QPM2102 a QPM2102E

with QPM2 and QPM2

with QPM1160/ QPM2163

with QPM2

... for outp QPM...

... for the ac function

display

Smart Infrastructure

Behavior in the event			
of fault QPM1100/1160/1162	 In the event of VOC failure, DC 10 V or 5 V or 20 mA will be present at signal output X1 (after 60 seconds) 		
QPM2	 In the event of CO₂ failure, DC 10 V or 5 V or 20 mA will be present at signal output X1 (after 60 seconds) 		
QPM2102/2102D/2163	 In the event of VOC failure, DC 10 V or 5 V or 20 mA will be present at signal output X2 (after 60 seconds) 		
QPM1160/2160 /2160D	 Should the temperature sensor become faulty, 0 V or 0 mA will be present at signal output X2 		
QPM1162/2162/2162D	 Should the temperature sensor become faulty, 0 V or 0 mA will be present at signal output X3, and the humidity signal at signal output X2 will increase to DC 10 V or 5 V or 20 mA (after 60 seconds) Should the humidity sensor become faulty, DC 10 V or 5 V or 20 mA will be present at signal output X2 (after 60 seconds), and the temperature signal will remain active 		
QPM2163	 Should the humidity sensor become faulty, DC 10 V or 5 V or 20 mA will be present at signal output X3 (after 60 seconds), and the temperature signal will remain active Should the temperature sensor become faulty, 0 V or 0 mA will be present at signal output X4, and the humidity signal at signal output X4 will increase to DC 10 V or 5 V or 20 mA (after 60 seconds) 		
Display of measured values	 With sensors type QPM2102D, QPM2160D and QPM2162D, the measured value be read on an LCD. The following measured values are displayed: - CO₂ : In ppm - CO₂ + VOC: As a bar chart: 4 bars ≏ X2 = 2 V or 1 V or 7,2 mA 20 bars ≏ X2 = 10 V or 5 V or 20 mA - Temperature: In °C or °F - Humidity: In % r.H. 		es are displayed: V or 1 V or 7,2 mA
	– Humidity:	11 /0 1.11.	
Accessories			
	Name		Type reference
	Filter cap (for re	eplacement)	AQF3101

Engineering notes

	To power the sensor, a transformer for safety extra low-voltage (SELV) with separate windings for 100 % duty is required. When sizing and protecting the transformer, local safety regulations must be complied with. When sizing the transformer, the power consumption of the duct sensor must be taken into consideration. For correct wiring, refer to the Data Sheets of the devices with which the sensor is used. The permissible cable lengths must be observed.
Cable routing and cable selection	When laying the cables, it must be observed that the longer the cables run side by side and the smaller the distance between them, the greater the electrical interference. Shielded cables must be used in environments with EMC problems. Twisted pair cables are required for the secondary supply lines and the signal lines.

Mounting notes


Mounting location and	To ensure degree of protection IP54	resp IP65 the sensor mu	st be fitted with the cable	
orientation	To ensure degree of protection IP54 resp. IP65, the sensor must be fitted with the entry pointing downward! The sensor should be mounted in locations where it can be easily accessed for se			
Note!	 If used in connection with steam humidifiers, the distance to the humidifier must be a minimum of 3 m. If permitted by the installation, the distance should be as great as possible, but no more than 10 m The sensing elements in the immersion rod are susceptible to impact and shock. Any impact or shock should therefore be avoided 			
	 The sensor must not be mounted in solar radiation)! To ensure correct lie in the range of -5+45 °C 	n ventilation plant on top o		
Mounting instructions	Mounting Instructions are enclosed in the package.			
Commissioning notes				
	The sensor's functions can be check	ed 30 minutes after applyi	ng power:	
Checking the	 In well ventilated rooms, the senso 	r shows the CO ₂ concentra	ation of the outside air.	
CO ₂ function				
-	Typically, this is 360 ppm (the sensor's measuring accuracy must be considered). Also, a basic functional check can be made by exhaling on the sensor. In that case, it must be taken into account that the sensor's rate of response has been purposely delayed (time constant t_{63} = 5 min)			
Chooking the	 Touch the sensor with a cotton bal 	l dowsed in alcohol (e.g. g	as from a cigarette light-	
Checking the VOC function	er, without lighting a flame)		ao nom a organotto ngitt	
	Ventilation should start when the preset switching level of the connected controller is			
	reached.			
	reacheu.			
Disposal		el indicate that the produc	t, its packaging, and,	
Disposal	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to <u>www.s</u>	not be disposed of as dom n(s) at separate collection gislation.	nestic waste. Delete all and recycling facilities in	
Disposal	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le	not be disposed of as dom n(s) at separate collection gislation.	nestic waste. Delete all and recycling facilities in	
	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le	not be disposed of as dom n(s) at separate collection gislation. <u>siemens.com/bt/disposal</u> AC 24 V ±20 % or DC	nestic waste. Delete all and recycling facilities in	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to <u>www.s</u>	not be disposed of as dom n(s) at separate collection gislation. iemens.com/bt/disposal	nestic waste. Delete all and recycling facilities in 	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to <u>www.s</u>	not be disposed of as dom n(s) at separate collection egislation. <u>siemens.com/bt/disposal</u> AC 24 V ±20 % or DC or	nestic waste. Delete all and recycling facilities in 	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A	nestic waste. Delete all and recycling facilities in 	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 11 Characteristic B, C	nestic waste. Delete all and recycling facilities in	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage	not be disposed of as dom n(s) at separate collection gislation. <u>siemens.com/bt/disposal</u> AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 13 Characteristic B, C or	nestic waste. Delete all and recycling facilities in	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage	not be disposed of as dom n(s) at separate collection gislation. <u>siemens.com/bt/disposal</u> AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 13 Characteristic B, C or	and recycling facilities in 	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU)	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 13 Characteristic B, C or Power source with cur	nestic waste. Delete all and recycling facilities in 	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU) Power consumption	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 11 Characteristic B, C or Power source with cur At "U" output signal	and recycling facilities in and recycling facilities in 1535 V (SELV) JS) 3 A c, D according to rent limitation of max. 10 A "I" output signal	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU) Power consumption QPM1100	not be disposed of as dom n(s) at separate collection gislation. <u>siemens.com/bt/disposal</u> AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 11 Characteristic B, C or Power source with cur At "U" output signal Max. <1.6 VA	and recycling facilities in and recycling facilities in 1535 V (SELV) JS) 3 A 5, D according to rent limitation of max. 10 A "I" output signal Max. <3.5 VA	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU) Power consumption QPM1100 QPM2180, QPM2160, QPM2160D	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 13 Characteristic B, C or Power source with cur At "U" output signal Max. <1.6 VA Max. <1.5 VA	A contract of the second secon	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage <u>Frequency</u> External supply line protection (EU) Power consumption QPM1100 QPM2100 QPM2100, QPM2160, QPM2160D QPM2102, QPM2102D	not be disposed of as dom m(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 11 Characteristic B, C or Power source with cur At "U" output signal Max. <1.6 VA Max. <1.5 VA Max. <0.9 VA Max. <1.8 VA	A contract of the second secon	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU) Power consumption QPM2100 QPM2100 QPM2100, QPM2160, QPM2160D QPM2102, QPM2102D QPM2162, QPM2162D	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 13 Characteristic B, C or Power source with cur At "U" output signal Max. <1.6 VA Max. <1.5 VA Max. <0.9 VA Max. <0.9 VA	A contract of the second secon	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU) Power consumption QPM2100 QPM2180, QPM2160, QPM2160D QPM2180, QPM2162D QPM2162, QPM2162D QPM1160	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 11 Characteristic B, C or Power source with cur At "U" output signal Max. <1.6 VA Max. <1.5 VA Max. <0.9 VA Max. <0.9 VA Max. <0.9 VA Max. <2.1 VA	and recycling facilities in and recycling facilities in 1535 V (SELV) JS) 3 A c, D according to rent limitation of max. 10 A "I" output signal Max. <3.5 VA Max. <3.2 VA Max. <3.2 VA Max. <3.2 VA Max. <3.4 VA Max. <2.9 VA	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU) Power consumption QPM1100 QPM2100 QPM2100, QPM2160, QPM2160D QPM2102, QPM2162, QPM2162D QPM2162, QPM2162D QPM1160 QPM1162	not be disposed of as dom m(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 11 Characteristic B, C or Power source with cur At "U" output signal Max. <1.6 VA Max. <1.6 VA Max. <1.5 VA Max. <0.9 VA Max. <0.9 VA Max. <2.1 VA Max. <2.1 VA	and recycling facilities in and recycling facilities in 1535 V (SELV) JS) 3 A , D according to rent limitation of max. 10 A "I" output signal Max. <3.5 VA Max. <3.5 VA Max. <3.9 VA Max. <3.9 VA Max. <3.9 VA Max. <3.5 VA Max. <3.5 VA	
Technical data	This symbol or any other national lab where applicable, any batteries may personal data and dispose of the iter accordance with local and national le For additional details, refer to www.s Operating voltage Frequency External supply line protection (EU) Power consumption QPM2100 QPM2180, QPM2160, QPM2160D QPM2180, QPM2162D QPM2162, QPM2162D QPM1160	not be disposed of as dom n(s) at separate collection egislation. AC 24 V ±20 % or DC or AC/DC 24 V class 2 (U 50/60 Hz at AC 24 V Fuse slow max. 10 A or Circuit breaker max. 11 Characteristic B, C or Power source with cur At "U" output signal Max. <1.6 VA Max. <1.5 VA Max. <0.9 VA Max. <0.9 VA Max. <0.9 VA Max. <2.1 VA	and recycling facilities in and recycling facilities in 1535 V (SELV) JS) 3 A 5, D according to rent limitation of max. 10 A "I" output signal Max. <3.5 VA Max. <3.2 VA Max. <3.2 VA Max. <3.2 VA Max. <3.4 VA Max. <3.4 VA Max. <3.5 VA Max. <3.5 VA Max. <3.5 VA Max. <3.5 VA Max. <3.5 VA Max. <3.5 VA	

Siemens Smart Infrastructure


Functional data "CO ₂ "	Measuring range	02000 ppm
	Measuring accuracy at 23 °C and 1013 hPa	$\leq \pm$ (50 ppm + 2 % of measured value)
	Temperature dependency	
	in the range of -545 °C	±2 ppm / °C (typically)
	Long-time drift	<pre></pre>
	Time constant t ₆₃	<5 min
	Output signal, linear (terminal X1)	DC 010 V ≙ 02000 ppm,
		bc 010 V = 02000 ppm,
		420 mA
	Recalibration-free	8 years
Functional data "VOC"	Measuring range	0100% VOC
	Time constant t_{63} VOC (CO ₂ see above)	<13 min (R1), <3.5 min (R2), <1 min (R3)
	Output signal, linear (terminal X1)	DC 010 V or DC 05 V ≙ 0100%, max. ±1 mA
		420 mA
Functional data "Maximum selection of CO_2 and	Output signal, linear (terminal X2)	DC 010 V or DC 05 V
VOC" with QPM2102, QPM2102D and QPM2163		420 mA
	Range of use	095 % r.h. (noncondensing)
Functional data "r.h."	Measuring range	0100 % r.h.
with QPM2162D, QPM1162	Measuring accuracy at 23 °C and DC 24 V	
and QPM2163	095 % r.h.	±5 % r.h.
	3070 % r.h.	±3 % r.h. (typically)
	Time constant t ₆₃	Approx. 20 s
	Output signal, linear (terminal X2)	DC 010 V or DC 05 V ≙
		0100 % r.h., max. ±1 mA
		420 mA ≙ 0100 % r.h., max. 500 Ohm
Functional data "Tempera-	Range of use	-5+45 °C
ture" with QPM2160/	Measuring range	050 °C (R2)
QPM2160D, QPM2162/		or – 35+ 35 °C (R1)
QPM2162D,	Measuring accuracy at DC 24 V in the range of	
QPM1160/QPM1162/	23 °C	±0.3 K (typically)
QPM2163	1535 °C	±0.6 K
	-35+50 °C	±1 K
	Time constant	<3.5 min. in with 2 m/s moved air
	Output signal, linear (terminal X2, X3 or X4)	DC 010 V or DC 05 V ≙ 050 °C / −35+35 °C max. ±1 mA
		$420 \text{ mA} \cong 050 ^{\circ}\text{C}, / -35+35 ^{\circ}\text{C},$
		max. 500 Ohm
Functional data "Tempera-	Sensing range	See "Mode of operation"
ture" with QPM218	Measuring accuracy	See "Mode of operation"
	Time constant t_{63}	<3.5 min. at 2 m/s of circulated air
	Output signal (terminal B, M)	Passive
Air velocity	Max. air velocity V _{max.}	10 m/sec.
Degree of protection	Protection degree of housing QPM2102D, QPM2160D, QPM2162D	IP65 according to EN 60529 in the built-in state
		IDE4 according to EN 60520
	QPM1100, QPM1160, QPM1162, QPM2100, QPM2102, QPM2160, QPM2162, QPM2163, QPM2180	IP54 according to EN 60529 in the built-in state
	Protection class	III according to EN 60730-1
Electrical connections	Screw terminals for	$1 \times 2.5 \text{ mm}^2 \text{ or } 2 \times 1.5 \text{ mm}^2$
·····-		


Environmental conditions	Operation to	IEC 60721-3-3	
	Climatic conditions	Class 3K3	
	Temperature (housing incl. electronics)	050 °C	
	Humidity	095 % r.h. (noncondensing)	
	Mechanical conditions	Class 3M2	
	Transport to	IEC 60721-3-2	
	Climatic conditions	class 2K3	
	Temperature	−25+70 °C	
	Humidity	<95 % r.h.	
	Mechanical conditions	Class 2M2	
Materials and colors	Base	Polycarbonate, RAL 7001 (silver-grey)	
	Cover	Polycarbonate, RAL 7035 (light-grey)	
	Immersion rod	Polycarbonate, RAL 7001 (silver-grey)	
	Filter cap	Polycarbonate, RAL 7001 (silver-grey)	
	Mounting flange	PA66 – GF35 (black)	
	Cable entry gland	PA, RAL 7035 (light-grey)	
	Sensor (complete assembly)	Silicone-free	
	Packaging	Corrugated cardboard	
Directives and Standards	Product standard	EN 60730-1	
		Automatic electrical controls for household and	
		similar use	
	Electromagnetic compatibility (Applications)	For use in residential, commerce, light-industrial and	
		industrial environments	
	EU Conformity (CE)	CE1T1962xx *)	
	RCM Conformity	CE1T1961en_C1 *)	
	UL	UL 873, http://ul.com/database	
	UKCA	A5W00188730A *)	
	Applicability of flammable refrigerants	Comply with clauses 22.116 and 22.117 from IEC	
	(Only for QPM2100 produced after April 1st,	60335-2-40 for used together with all refrigerants	
	2025)	listed in Annex BB (IEC 60335-2-40)	
Environmental compatibility	The product environmental declaration CE1E1962 ^{°)} contains data on environmentally compatible prod-		
	uct design and assessments (RoHS compliance, materials composition, packaging, environmental		
	benefit, disposal).		
Weight	Incl. packaging		
	QPM1100, QPM2100, QPM2102	Approx. 0.25 kg	
	QPM2160, QPM2162, QPM2180	Approx. 0.25 kg	
	QPM2102D	Approx. 0.27 kg	
	QPM2160D, QPM2162D	Approx. 0.27 kg	
	QPM1160, QPM1162	Approx. 0.237 kg	
	QPM2163	Approx. 0.263 kg	
	ppm = parts per million (number of parts per on	·· •	

*) The documents can be downloaded from <u>http://siemens.com/bt/download</u>.

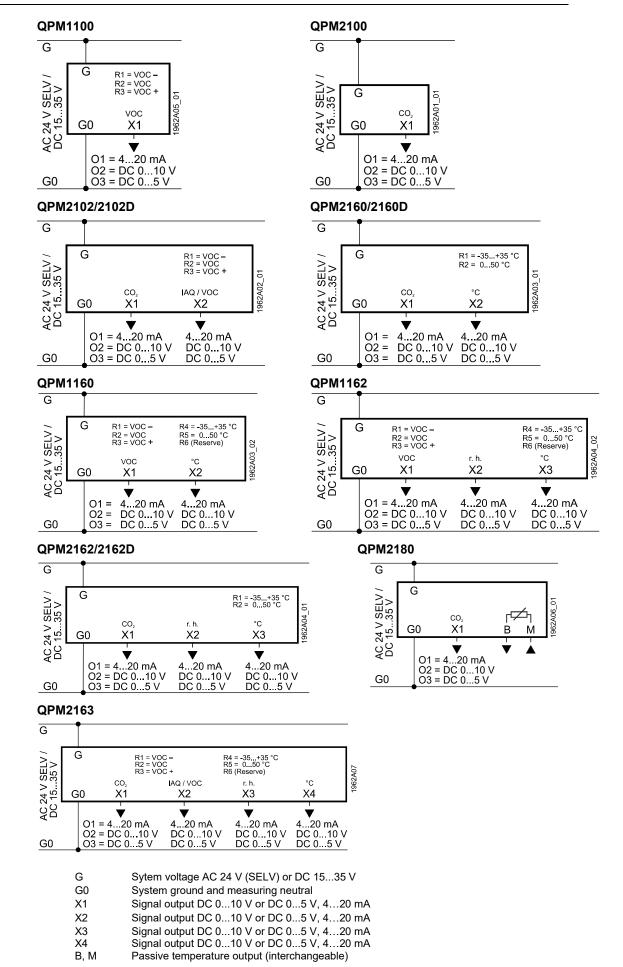


Dimensions

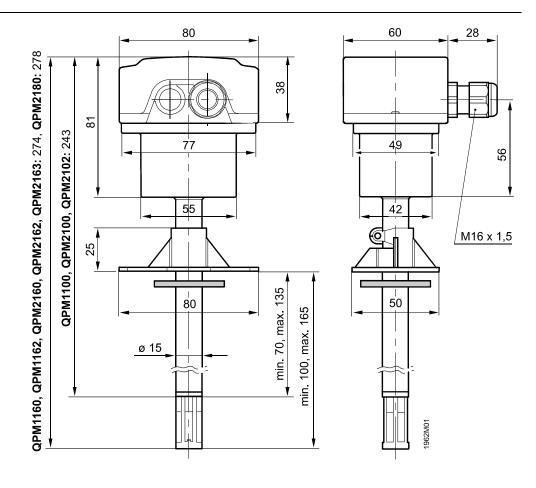





Drilling plan

Dimensions in mm

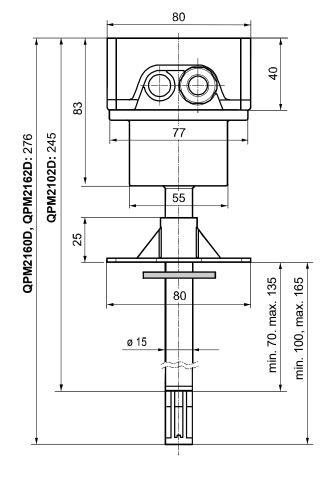

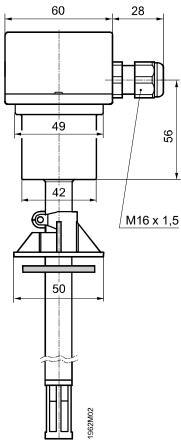



Drilling plan

Dimensions in mm

Issued by Siemens Switzerland Ltd Smart Infrastructure Global Headquarters Theilerstrasse 1a CH-6300 Zug Tel. +41 58 724 2424 www.siemens.com/buildingtechnologies

14/14

Siemens Smart Infrastructure © Siemens Switzerland Ltd, 2005 – 2025 Technical specifications and availability subject to change without notice.